

IKARIA DOUBLE



IKARIA DOUBLE

Material	steel pipes Ø 28 mm / steel pipes Ø 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	28, 48, 72




IKARIA DOUBLE 1212 × 600



Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
732/600	68	12,4	5,7	1,141	591	461	330	600	-	564
1212/600	68	21,2	9,7	1,141	955	793	533	900	-	564
1772/600	68	31,8	14,6	1,141	1429	1187	798	1200	-	564

Thermal power measuring follows in accordance with EN 442.

Accessories (page 64, 65 and 66) is not part of the radiator.




Connection options





DIKD 0732 0600...



DIKD 1212 0600...

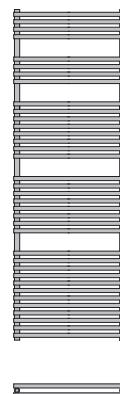

DIKD 1772 0600...



	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	133 - 143	98 - 108
Metal brackets (Other colours)	128 - 138	93 - 103