

# VARIANT MIRROR



## VARIANT MIRROR

|                             |                                                                                                  |
|-----------------------------|--------------------------------------------------------------------------------------------------|
| Material                    | whole area mirror, thickness 4 mm<br>steel pipes $\varnothing$ 28 mm / steel profiles 70 × 11 mm |
| Connection thread           | 2 × G1/2"                                                                                        |
| Testing overpressure        | 0,65 MPa                                                                                         |
| Max. operating overpressure | 0,5 MPa                                                                                          |
| Max. operating temperature  | 95 °C                                                                                            |




VARIANT MIRROR 1806 × 608

| Type H/L<br>[mm] | Depth B<br>[mm] | Weight<br>[kg] | Water capacity<br>[l] | Temperature<br>exponent [n] | Heating Output [W] |             |             | Recommended power<br>input stainless steel [W] | Connection<br>span [mm] |
|------------------|-----------------|----------------|-----------------------|-----------------------------|--------------------|-------------|-------------|------------------------------------------------|-------------------------|
|                  |                 |                |                       |                             | 75/65/20 °C        | 70/55/20 °C | 55/45/20 °C |                                                |                         |
| <b>1806/456</b>  | 45              | 42,5           | 6,1                   | 1,28                        | <b>564</b>         | 458         | 293         | –                                              | mc 50                   |
| <b>1806/608</b>  | 45              | 55,9           | 8,2                   | 1,28                        | <b>749</b>         | 608         | 390         | –                                              | mc 50                   |



Basic point on back is the anthracit S02.

Thermal power measuring follows in accordance with EN 442.

Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

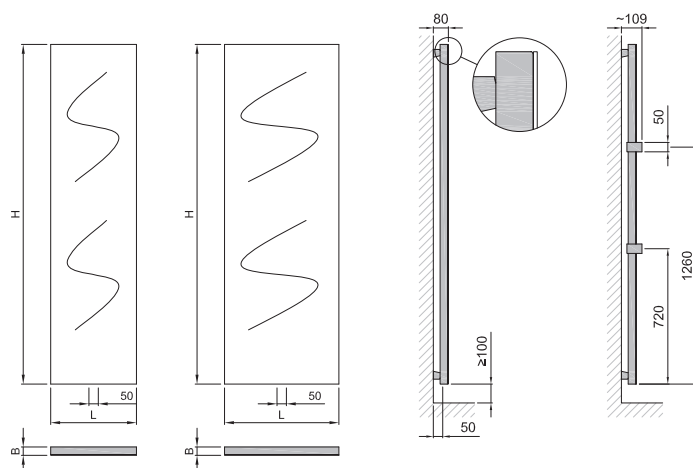

DVMR 1806 0456...

DVMR 1806 0608...

Option of adding  
up to 2 rails